

GUTTER GUARD


For 5" or 6" Gutter.

- HEAVY ALUMINUM STOCK FOR DURABILITY.
- PROPERLY STAGGERED SLOTS CATCH ALL OF THE WATER.
- FLAT TOP SURFACE LETS LEAVES AND PINE NEEDLES WASH OR BLOW OFF.
- FAST AND SIMPLE TO INSTALL.



INSTRUCTIONS FOR INSTALLATION

Louvers go down, flat side up.

NOTE: *Gutter Guard may be installed either flat on top of the gutter or, preferably, worked under the edge of the shingles.*

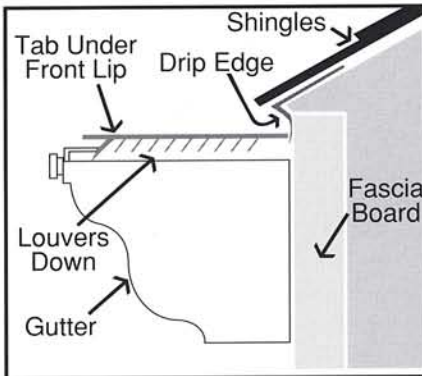

1. Examine the tabs on the front edge of the Gutter Guard. They should be bent down 60° to 90°; enough to get under the front lip of the gutter.
2. Put Gutter Guard in place on the gutter section, with the flat edge (side without the tabs) set against the roof side of the gutter or worked under the edge of the shingles.
3. Using a small, flat bladed screwdriver or a cap lifter, reach through the louver above the tab and bend the tab under the front lip of the gutter. Screws or pop rivets may be used to secure the front edge of the Gutter Guard to the lip of the gutter.

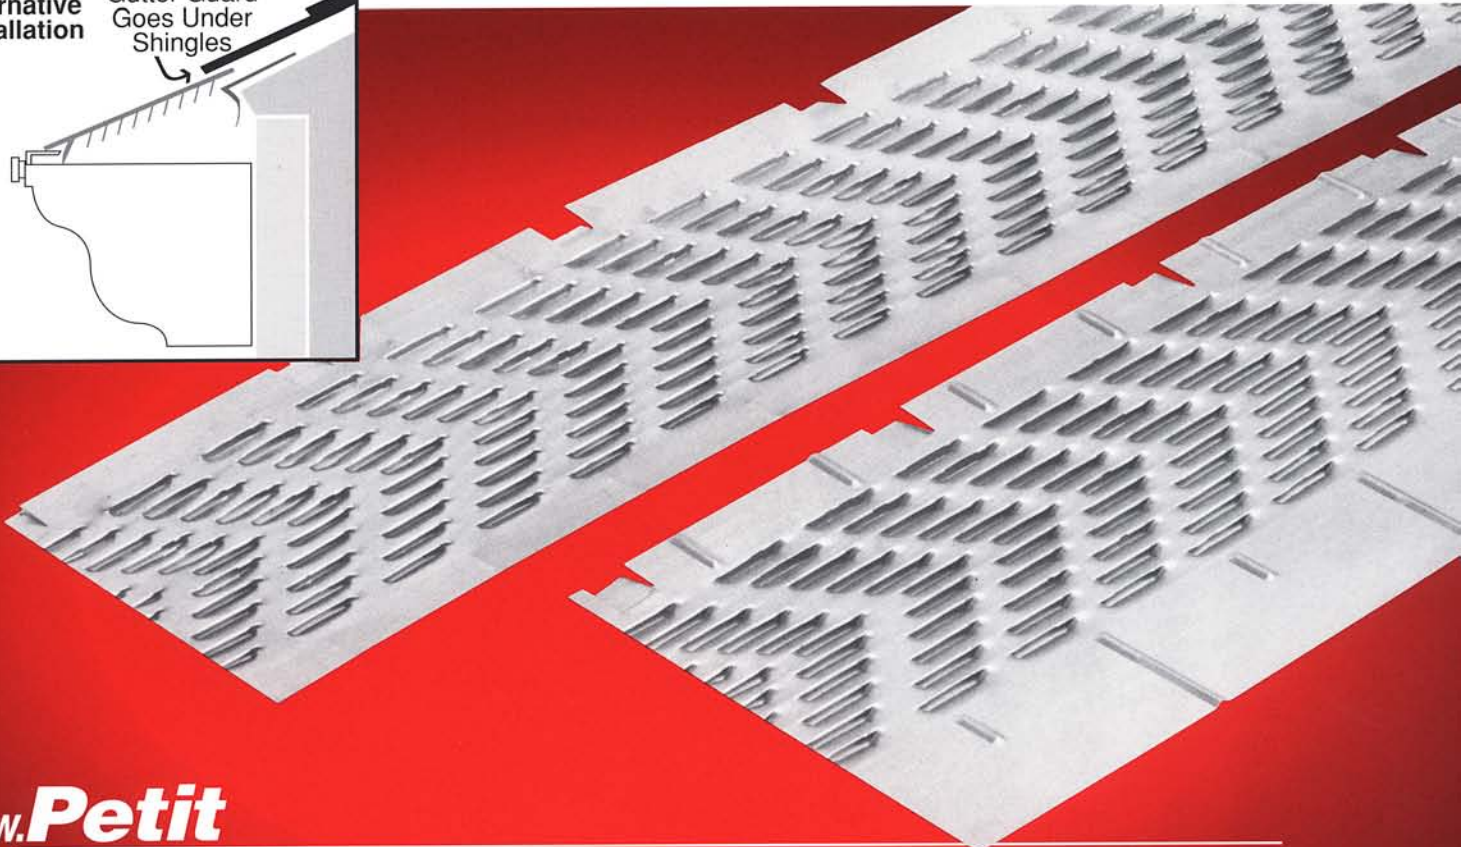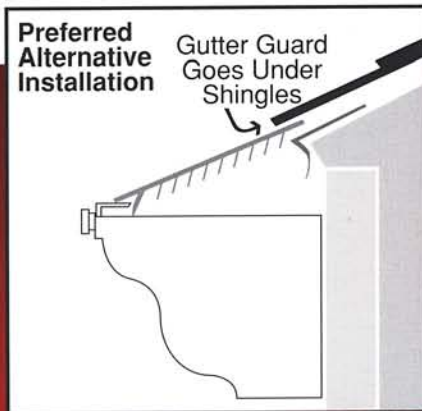

www.**Petit**
Tool.com

1387 WATERBURY RD. • THOMASTON, CT 06787 • (203) 283-9626
1-800-662-5678 • FAX (203) 283-6860